




Hexa Precision Industries

“House of Hydraulic Pumps, PTO’s & Accessories”

HIGH PERFORMANCE COMPACT DESIGN

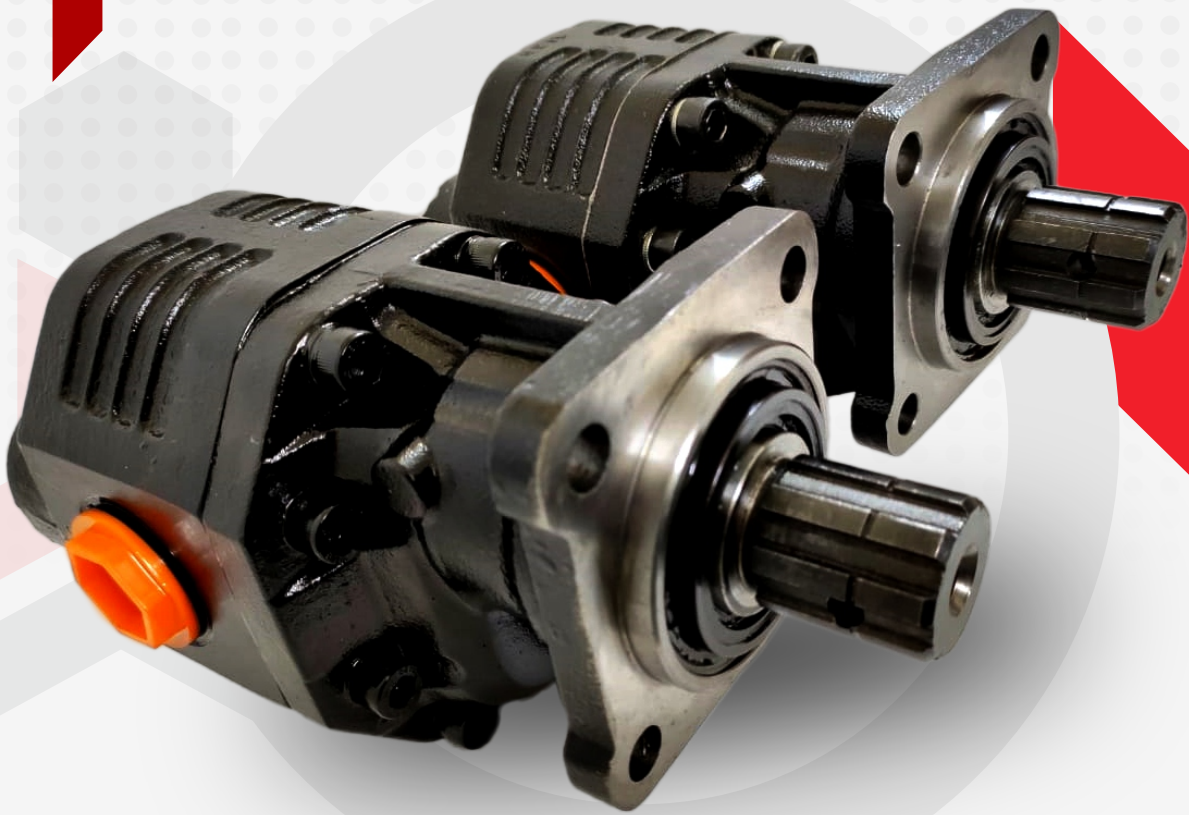


HX SERIES HYDRAULIC GEAR PUMP ISO 4-BOLT BI ROTATIONAL TYPE






Hexa Precision Industries

“House of Hydraulic Pumps, PTO’s & Accessories”

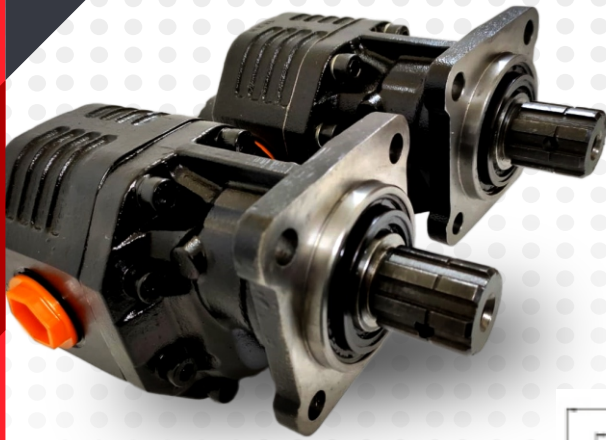

Ultimate power and performance in a compact design of HX Series hydraulic gear pumps, The heavy duty taper rollers bearing giving High rigidity & providing both long life and high performance.

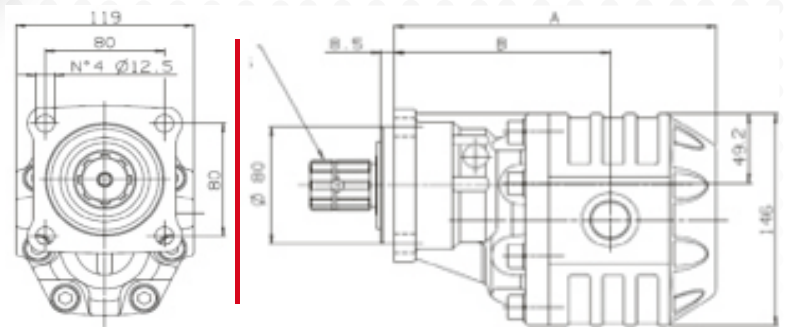

KEY FEATURES

- 2 Standard sizes
- Compact design
- Pressure up to 250 bar
- Speed up to 2400 RPM
- Shaft DIN 5462 (8x32x36)
- Low noise level
- G1” BSP Ports
- Dowel pin design
- Maximum Efficiency
- Stringent Quality Testing

PUMP SPECIFICATIONS

Model	Mounting Flange	Displacement (cc)	RPM Min./ Max.	Continuous RPM	Max Working Pressure (BAR)	Ports Inlet/ Outlet	Inlet Vacuum (Bar)	Weight (KG)
HX4BP48	ISO 4-BOLT	48cc	600/2400	1500	190	G1” BSP	0.7- 3.0 bar	11.8 KG
HX4BP90	ISO 4-BOLT	90cc	600/2400	2000	200	G1” BSP	0.7- 3.0 bar	17.3 KG

MODEL NUMBER CONSTRUCTION - HXP484B1SB

HX	P48	4B	1	S	B
Series Code	Displacement @1000RPM	Mounting Flange	Shaft Type DIN 5462 (8X32X36)	S - Rear Port R - Rear Port	Rotation B - BI Rotational



House of Hydraulic Pumps, PTO’s & Accessories

✉ info@hexaprecision.com 🌐 www.hexaprecision.com