



Hexa Precision Industries

"House of Hydraulic Pumps, PTO's & Accessories"




GLOBAL FOOT PRINTS



HX SERIES – UNI3-BOLT PUMPS

Power, Precision & Performance packed in our HX Series Gear Pumps. Built with precision engineered components, these pumps ensure consistent heavy-duty performance with long service life in demanding conditions.

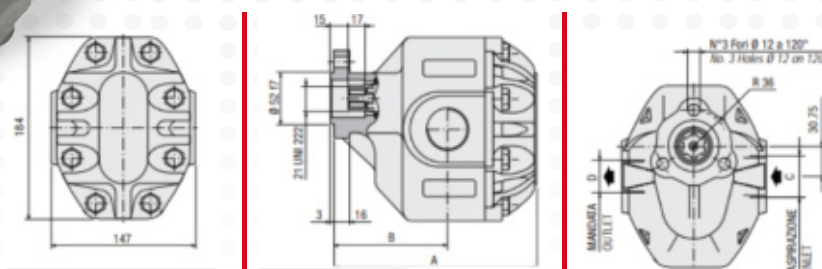

KEY FEATURES

- 3 Standard sizes
- Compact design
- Pressure up to 250 bar
- Speed up to 2400 RPM
- Shaft 21 UNI 222 (6x21x25)
- Low noise level
- G1" BSP Ports
- Dowel pin design
- Maximum Efficiency
- Stringent Quality Testing

MODEL NUMBER CONSTRUCTION – HX3 45 BD 2P

Series Code	Mounting Flange	Displacement@1000 RPM	Direction type	Port Type
HX	UNI 3 Bolt	45cc / 65cc / 83cc	BI-Directional	2P - Side Port 4P - 4 Port RP - Rear Port

PUMP SPECIFICATIONS

Model	Mounting Flange	Displacement (cc)	RPM Min. - Max.	Continuous RPM	Max Working Pressure (BAR)	Ports Inlet/ Outlet	Inlet Vacuum (Bar)	Weight (KG)
HX345BD2P	UNI 3-BOLT	45cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	9.6 KG
HX365BD2P	UNI 3-BOLT	65cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	11.9 KG
HX383BD2P	UNI 3-BOLT	83cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	14.5 KG

