



Hexa Precision Industries

"House of Hydraulic Pumps, PTO's & Accessories"



GLOBAL FOOT PRINTS


HX SERIES - ISO 4 BOLT PUMPS



Ultimate power and performance in a compact design of **HX Series** hydraulic gear pumps. The heavy duty taper rollers bearing giving High rigidity & providing both long life and high performance.

Output Option:

- Rear Port
- Side Port
- 4 Ports

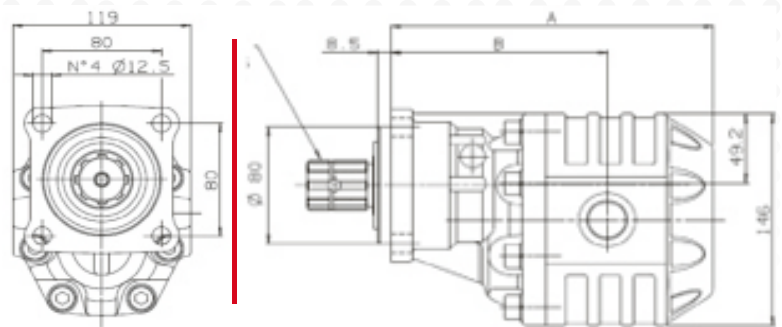

KEY FEATURES

- 3 Standard sizes
- Compact design
- Pressure up to 250 bar
- Speed up to 2400 RPM
- Shaft DIN 5462 (8x32x36)
- Low noise level
- G1" BSP Ports
- Dowel pin design
- Maximum Efficiency
- Stringent Quality Testing

MODEL NUMBER CONSTRUCTION - HX 4 48 BD 2P

Series Code	Mounting Flange	Displacement@1000 RPM	Direction type	Port Type
HX	ISO 4 Bolt	48cc / 65cc / 82cc	Bi-Directional	2P - Side Port 4P - 4 Port RP - Rear Port

PUMP SPECIFICATIONS

Model	Mounting Flange	Displacement (cc)	RPM Min. - Max.	Continuous RPM	Max Working Pressure (BAR)	Ports Inlet/ Outlet	Inlet Vaccum (Bar)	Weight (KG)
HX448BD2P	ISO 4-Bolt	48cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	14.5 KG
HX465BD2P	ISO 4-Bolt	65cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	15.3 KG
HX482BD2P	ISO 4-Bolt	82cc	600 - 2400	1500	190	G1" BSP	0.7- 3.0 bar	16.3 KG

PG-4



House of Hydraulic Pumps, PTO's & Accessories

info@hexaprecision.com www.hexaprecision.com